





PURITY™ FG2 EXTREME GREASE

Introduction

PURITY™ FG2 EXTREME Grease is a high viscosity, semi synthetic, heavy duty food grade grease specifically formulated for low to medium speed, heavily loaded industrial bearings operating under severe conditions. PURITY FG2 EXTREME exhibits excellent protection in applications subjected to high temperature, high pressure, and heavy loads while operating continuously, such as in animal feed pellet mills and continuous rotary cookers.

Superior Performance Benefits

- **Superior protection of gears, bearings and equipment in highly loaded or shock loaded situations**
 - Helps to prevent seizure, scuffing and spalling under shock loading conditions
 - Extends the life of the equipment

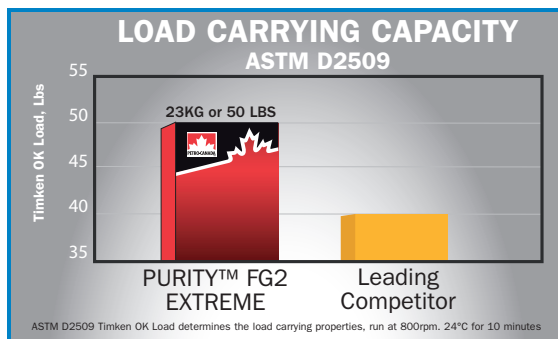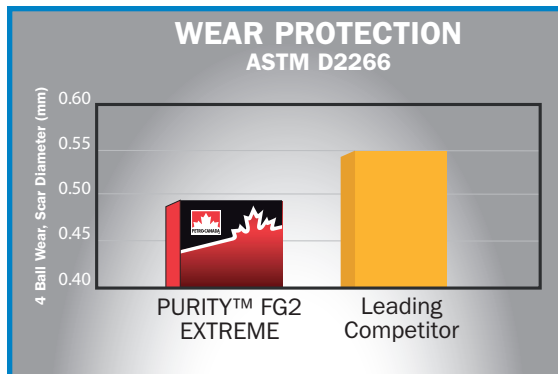

- **Superior resistance to lubricant breakdown in harsh operating environments**
 - Maintains consistency and lubrication in the presence of contaminants such as: food by-products, dirt and dust

- Highly resistant to water washout, water jet spray, and most sterilizing chemicals used in cleaning
- **Long-term equipment protection from rust and corrosion**
 - Helps to prevent bearing, gear and equipment damage in moist or wet operations
- **Effective across a wide range of temperatures**
 - Will not run from bearings exposed to high heat
 - Pumpable at low temperatures
 - Ideal for heavily loaded bearings operating under wide temperature swings
- **White, non-staining performance**
 - Easy to spot excess grease squeezing out of failing seals
 - Does not stain clothing, wood or porous materials
 - Wipes up easily and effectively in the event of incidental contact with food products or packaging

What is the HT difference?

Petro-Canada starts with the HT purity process to produce water-white, 99.9% pure base oils. The result is a range of lubricants, specialty fluids and greases that deliver maximum performance for our customers.



Food Grade Approved

- **Fully approved for use in and around food processing areas**
 - H1 registered by NSF
 - This product is produced in strict compliance with ISO 21469
 - All components comply with FDA 21 CFR 178.3570 "Lubricants with incidental food contact"
 - Acceptable for use in food processing facilities in Canada
 - Certified Kosher and Pareve by Star K
 - Certified Halal by IFANCA
- **Free of genetically modified substances (GMS)**
- **Maintains food allergy safety**
 - Free of gluten
 - Does not contain, nor is it manufactured in a facility that manufactures, stores, or otherwise handles any nuts, sesame seeds, milk, eggs, fish and shellfish, soy, wheat or sulphites. For a complete list of PURITY FG approvals, consult a Petro-Canada Lubricants Technical Service Representative
- **Zinc free**



Nonfood Compounds Program Listed H1



Typical Performance Data

| PROPERTY | TEST METHOD | PURITY FG2 EXTREME GREASE |
|---|----------------------------------|---------------------------------|
| NLGI Grade | - | 2 |
| Grease Type | - | Aluminum Complex |
| Penetration: Unworked Worked 60 strokes Penetration Change after 10,000 strokes | D217 | 266 276 5 |
| Colour | - | White |
| Odour | - | Odourless |
| Dropping Point, °C / °F | D2265 | 264 / 507 |
| Water Washout Resistance, % @ 79°C (174°F) | D1264 | 3.5 |
| Water Spray Off, wt. % | D4049 | 10.4 |
| Extreme Pressure Protection: Timken, kg / lb Four Ball Wear, scar diam, mm Four Ball Weld, kg Load Wear Index | D2509 D2266 D2596 D2596 | 23 / 50 0.48 400 62.4 |
| Corrosion Protection: Copper Corrosion Bearing Corrosion | D4048 D1743 | 1a Pass |
| Oxidation Stability: Pressure drop after 100 hours, kPa (PSI) | D942 | 0 (0) |
| Base Oil Viscosity, cSt @ 40°C (SUS @ 100°F) cSt @ 100°C (SUS @ 210°F) | D445 D445 | 469 (2502) 33.2 (162) |
| Base Oil Pour Point, °C / °F | D5950 | -4 / 25 |
| Normal Operating Temperature Range | | -20°C to 160°C -4°F to 320°F |

The values quoted above are typical of normal production. They do not constitute a specification.

Health and Safety

To obtain Material Safety Data Sheet (MSDS), contact one of Petro-Canada's TechData Info Lines.



TechData Info Lines

To place an order, please call a Customer Order Management Representative at :

Canada (English) Phone 1-800-268-5850
(French) Phone 1-800-576-1686
United States Phone 1-877-730-2369
Latin America Phone +1-416-730-2369
Europe Phone +1-416-730-2389
Asia Phone +1-416-730-2372
China Phone +86 (21) 6362-0066

To learn more about how Petro-Canada lubricants, specialty fluids, oils and greases can help maximize your equipment performance, savings and productivity, please contact us at :

North America Phone 1-866-335-3369
Europe Phone +44 (0) 121-781-7264
Germany Phone +49 (0)201 726 2913
Latin America Phone +1-416-730-2369
Asia Phone +1-416-730-2372
China Phone +86 (21) 6362-0066
E-mail sales@suncor.com

You can also e-mail us at lubecsr@suncor.com

Visit us on the web at lubricants.petro-canada.com

IM-8026E (2014.09)

Petro-Canada is a Suncor Energy business
™Trademark of Suncor Energy Inc. Used under licence.

Beyond today's standards.

